


# RE-737MR

## Analogue Addressable Relay Module



### Product Overview:

RE-737MR Relay Module facilitates third party devices to interface with Ravel make addressable panel. Relay modules are the remote devices to activate / de-activate any device or instrument or unit using the potential free contacts. The RED blinking LED indicates normal operating conditions and the steady state LED for activated conditions. The Module addressing is done by soft addressing method through a Programming Tool or through panel.

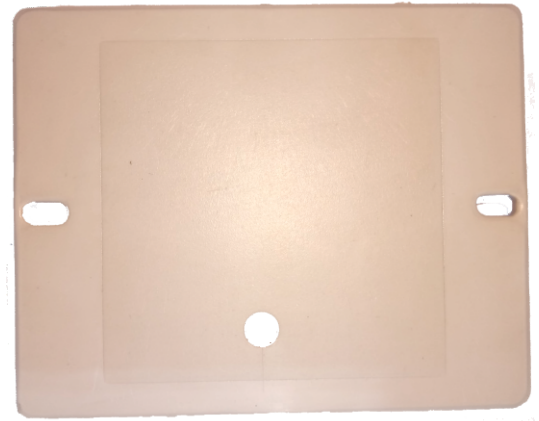

### Features:

- Inbuilt Isolator.
- Module Status by RED LED.
- Analogue Communication with the panel.
- Soft Addressing using programming tool.
- Low Standby Current.
- Available with suitable back boxes.


### Electrical Specification:

Operating Voltage	:	24 VDC Nominal
Current Draw	:	2 mA Max.
Standby Current	:	0.5 mA
Contact Rating	:	2A @ 30VDC(Resistive)
Temperature Range	:	0°C to 49°C / 32°- 120°F
Humidity	:	93 ± 2% RH (non-condensing) at 32 ±2° C / 90 ±3° F.
Relay Output	:	2 No's of Form C Potential Free Contact

### Mechanical Specification:


Dimensions	:	(95 W X 75 H X 24D) mm
Color	:	Light Gray
Weight	:	0.35 Kg

### G.A.Diagram:

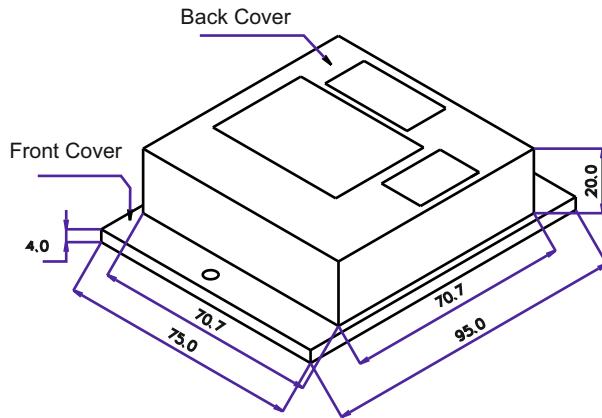


ALL DIMENSIONS ARE IN MM

### Mounting Detail:

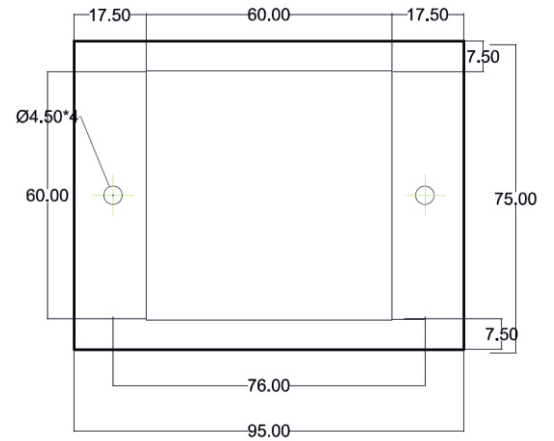

## Wiring Configuration for Relay Module

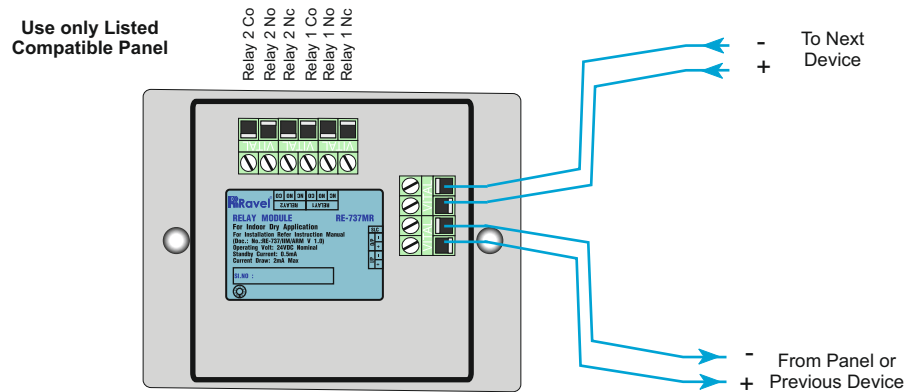

### NOTE:

- \* ALL WIRING SHOWN IS SUPERVISED AND POWER LIMITED
- \* RELAY OUTPUT ARE NOT SUPERVISED

## Compatible Devices:

MODELS	DESCRIPTION
Monitl	Analogue Addressable Fire Alarm Control Panel

## Ordering Information:

MODEL	DESCRIPTION
RE-737MR	Analogue Addressable Relay Module

### India:

**RAVEL ELECTRONICS PVT LTD.,**  
(An ISO 9001 Company)  
150A, Electronics Industrial Estate, Perungudi, Chennai - 96 .India.  
E-Mail: marketing@ravelfire.com; Web : www.ravelfire.com

### United Kingdom:

**RAVEL ELECTRONICS LTD.,**  
Unit 11, Chancel Industrial Estate, Newhall street,  
Willenhall WV13 1NX, West Midlands, United Kingdom.  
E-mail: info@ravelfire.co.uk ;Web: www.ravelfire.co.uk