

RE-317D-SL

ADDRESSABLE PHOTOELECTRIC SMOKE DETECTOR

General

Addressable photoelectric smoke detectors are designed to work with Addressable panel. These photoelectric smoke detectors are low profile, polarity free, and have dual LED's for 360° visual indication. The LED's are blinking in normal operating condition whereas the steady state indicates fire status. It has a unique chamber designed to sense smoke produced by wide range of sources of combustion with insect free. The detectors sensitivity can be programmed through fire alarm control panel. It has a unique drift compensation where the detector adjusts its normal reference based on environment conditions.

Features


- UL listed and NFPA standard.
- Polarity free, and Dual LED's for 360° visibility.
- Advanced detection and communication protocol.
- Easy to install.
- Sleek low-profile housing design.
- Regular 100mm base.
- Address set by 8 digit DIP switch.



Specification

Electrical Specification	
Operating Voltage	17 ~ 28V DC.
Reset Voltage	Less than 3V.
Standby Current	500 μ A.
Start up Time	30 sec.
Alarm Current	5 mA .
Remote Output	2mA maximum open collector.
Smoke Sensitivity	(2.12 \pm 0.61) % obs/ ft (High: 1.1% obs/ft; Medium: 1.4% obs/ft; Low: 2.3% obs/ ft).
Air Velocity	0 – 4000 fpm.
Detector Spacing	9 meters
Operating Temperature	-10° C to 37.8° C.
Storage Temperature	-10° C to 60° C.
Humidity	0 – 95% RH, non-condensing.
Mechanical Specification	
Dimension	46 H x 100 D (mm)
Weight	150 g with base
Material	FR ABS plastic
IP Rating	IP-42

Wiring Diagram

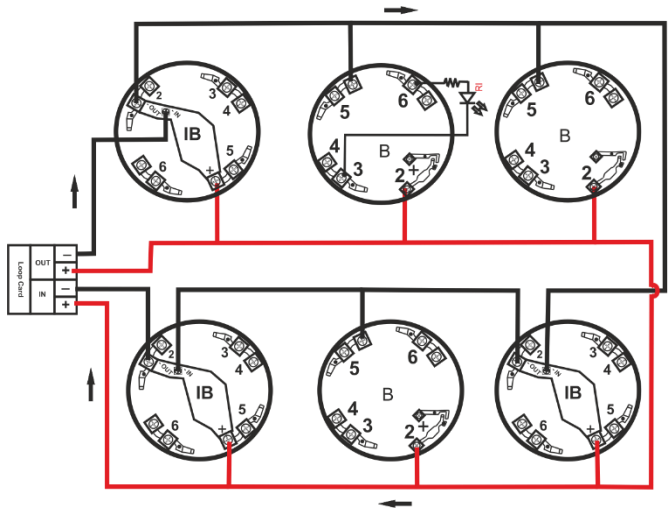

Note:

RI-Response Indicator
 B – Standard Base
 IB – Isolator Base

Compatible Device

Model	Description
<i>RE-314B</i>	Normal Base
<i>RE-314BI</i>	Isolator Base

Compatible Panel

Model	Description
<i>Avani</i>	Analogue addressable Fire Alarm Control panel expandable upto 4 loop
<i>Avani db</i>	Analogue Addressable Fire Alarm Control panel expandable upto 2 loop
<i>RE-4100</i>	Analogue Addressable Fire Alarm Control panel expandable upto 4 loop
<i>Avani XI</i>	Analogue Addressable Fire Alarm Control Panel expandable upto 8 Loop

Ordering Information

Model	Description
RE-317D-SL	Addressable Photoelectric Smoke Detector

India

RAVEL ELECTRONICS PVT LTD.,
 150A, Electronics Industrial Estate,
 Perungudi, Chennai – 96, India.
 E-mail: marketing@ravelfire.com; Web: www.ravelfire.com

United Kingdom

RAVEL ELECTRONICS LTD.,
 Unit 11, Chancel Industrial Estate, Newhall street,
 Willenhall WV13 1NX, West Midlands, United Kingdom.
 E-mail: info@ravelfire.co.uk; Web: www.ravelfire.co.uk

USA

RAVEL AMERICAS INC.,
 2855 NW 112th Ave ST#2 Miami,
 Doral, Florida 33172, USA.