

RE-45AR RS485 Driver



Product Overview

- ★ The RS 485 Interface module used to convert the data into RS 485 protocol.

Features


- ★ Allows up to 32 transceivers on the serial bus
- ★ Operates on 24V supply.

Technical Specification:

Operating Voltage	:	24 VDC
Operating Temperature	:	0°C to 49°C / 32 to 120°F.
Relative Humidity	:	93 ± 2% RH (non-condensing) at 32 ± 2° C/96 ± 3° F.
Standby current	:	0.05 Amps Max.
Cabinet Finish	:	Powder coated
Communication Interface	:	RS485
IP Rating	:	Ip50
Size	:	150L X 200H X 80W mm.
Weight	:	0.5Kg. Approx.



Wiring Detail:

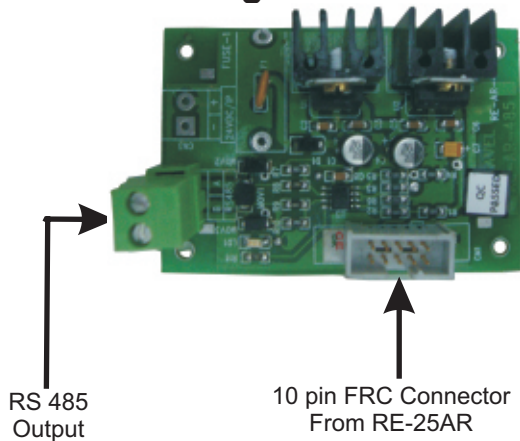


Compatibility

Fire Alarm Panel ---- RE - 25AR

Ordering Information

RE-45AR ---- RS485 Driver

Mounting Detail:

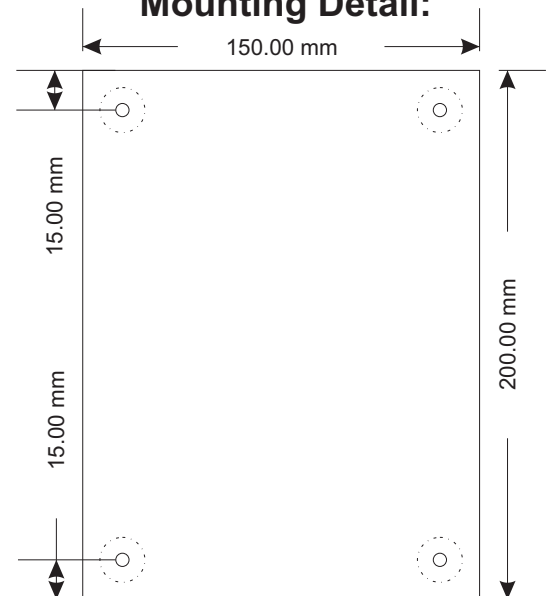

India:

RAVEL ELECTRONICS PVT LTD.,
(An ISO 9001 Company)
150A, Electronics Industrial Estate, Perungudi, Chennai - 96 .India.
E-Mail: marketing@ravelfire.com; Web : www.ravelfire.com

United Kingdom:

RAVEL ELECTRONICS LTD.,
Unit 11, Chancel Industrial Estate, Newhall street,
Willenhall WV13 1NX, West Midlands, United Kingdom.
E-mail: info@ravelfire.co.uk ;Web: www.ravelfire.co.uk