

RE-LS30B

Bi-Directional Projection Speaker



Features


- * Two 10 CM Dynamic cone speakers fitted at both the ends of the unit suitable for both speech and music providing quality sound for all requirements.
- * Three field selectable power taps.
- * Fitted with an adjustable U bracket for easy installation.
- * Ideal for installation in covered areas which are not susceptible to rain or excessive dampness.
- * Better sound quality for paging, announcement and background music.
- * ABS plastic grill at both the ends finished with matt grey.

Electrical Specification:

Power	: 30W
Tappings 100V line	: 5W / 10W / 15W
Sound Pressure Level	: 94dB (1W,1M)
Frequency	: 100-15000Hz
Material	: ABS Plastic
Dimensions	: \varnothing 155 mm, D 203 mm.
Weight	: 1.90 Kg (Approx)

Applications:

Banks, Offices, Restaurants, Factories, Lobbies.

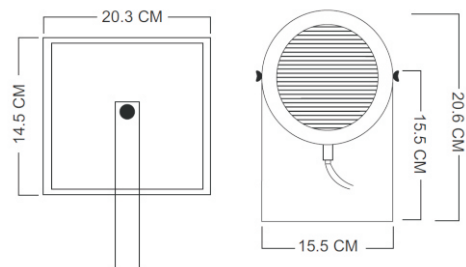

Mounting Detail

Ordering Information

Model	Description
RE-LS30B	Bi-Directional Projection Speaker

India:

RAVEL ELECTRONICS PVT LTD.,
(An ISO 9001 Certified Company)
150A, Electronics Industrial Estate, Perungudi, Chennai - 96 .India.
E-Mail: marketing@ravelfire.com; Web : www.ravelfire.com

United Kingdom:

RAVEL ELECTRONICS LTD.,
Unit 11, Chancel Industrial Estate, Newhall street,
Willenhall WV13 1NX, West Midlands, United Kingdom.
E-mail: info@ravelfire.co.uk ;Web: www.ravelfire.co.uk