


# RE-LU100XT


## P.A.Horn Speaker



|                  |   |                                   |
|------------------|---|-----------------------------------|
| HORN FLARE       | : | ABS RESIN, OFF WHITE              |
| REFLECTOR HORN   | : | ABS RESIN, DARK GRAY              |
| REAR COVER       | : | ABS RESIN, DARK GRAY              |
| 'U' BRACKET      | : | C.R.C., DARK GRAY, POWDER COATING |
| SCREWS AND BOLTS | : | M.S.                              |
| SPEAKER CABLE    | : | P.V.C. CABLE                      |

### Electrical Specification:

|                    |   |                                 |
|--------------------|---|---------------------------------|
| Input Power        | : | 15W (RMS) 24W (MAX)             |
| Taps               | : | 2.5W, 5W, 7.5W, 10W, 12.5W, 15W |
| Impedance          | : | 100V Line                       |
| Frequency Response | : | 275 - 7000 Hz                   |
| Type               | : | ABS Plastic                     |
| Size               | : | 205 $\varnothing$ (271 L)       |
| SPL @1Khz          | : | 106dB                           |
| Weight (Approx.)   | : | 1.800Kg                         |

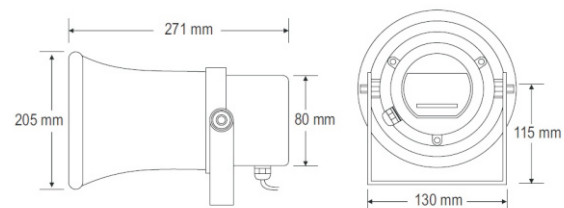

RE-LU100XT have been provided with 100V line Matching Transformer with multiple taps easily selectable by changing the rotary switch at the rear of the sealed assembly.

### Ordering Information

| Model      | Description       |
|------------|-------------------|
| RE-LU100XT | P.A. Horn Speaker |

#### India:

**RAVEL ELECTRONICS PVT LTD.,**  
 (An ISO 9001 Certified Company)  
 150A, Electronics Industrial Estate, Perungudi, Chennai - 96 .India.  
 E-Mail: marketing@ravelfire.com; Web : www.ravelfire.com

#### United Kingdom:

**RAVEL ELECTRONICS LTD.,**  
 Unit 11, Chancel Industrial Estate, Newhall street,  
 Willenhall WV13 1NX, West Midlands, United Kingdom.  
 E-mail: info@ravelfire.co.uk ;Web: www.ravelfire.co.uk